

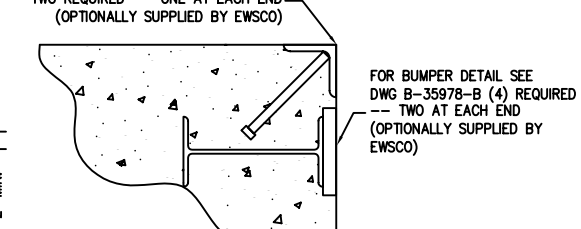


MATERIAL REQUIREMENTS		TOTAL WT. OF REBAR		926
PLAN A:				
CONCRETE:				
APPROACHES	9 CU. YDS			64
FOUNDATION 'A'	24 CU. YDS			334
REINFORCING:				528
REBAR 'A'	926			
4X4/4-4WWF	240 SQ FT			
6X6/10-10WWF	646 SQ FT			
PIECE NO.	QTY	BAR SIZE	LENGTH & DESCRIPTION	WT.
3	24	4	4'-0" 2'-0"	64
2	80	5	4'-0" 2'-0"	334
1	44	5	11'-6"	528

MATERIAL REQUIREMENTS		TOTAL WT. OF REBAR		926
PLAN B:				
CONCRETE:				
APPROACHES	9 CU. YDS			64
FOUNDATION 'B'	16 CU. YDS			334
REINFORCING:				528
REBAR 'B'	926			
4X4/4-4WWF	240 SQ FT			
PIECE NO.	QTY	BAR SIZE	LENGTH & DESCRIPTION	WT.
3	24	4	4'-0" 2'-0"	64
2	80	5	4'-0" 2'-0"	334
1	44	5	11'-6"	528

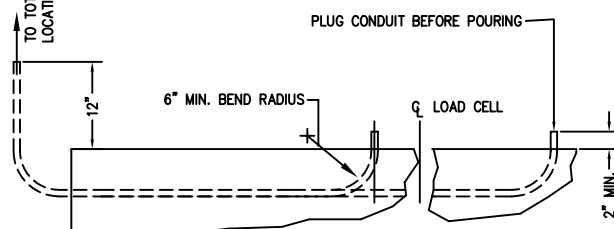

PRELIMINARY NOT FOR CONSTRUCTION. FOR ILLUSTRATION ONLY.

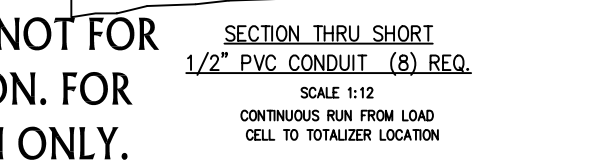

NOTES:

1. CONCRETE STRENGTH: $f'_c = 4,000$ PSI @ 28 DAYS
REINFORCING ROD: $F_y = 60,000$ PSI, ASTM A615, GRADE 60
2. PIERS AS SHOWN ARE SIZED FOR 3,000 SQ.FT.
3. THE CONCRETE AND REBAR SPECIFICATIONS SHOWN ARE FOR A NATIONWIDE RANGE OF CONDITIONS AND MAY NEED MODIFICATION FOR LOCAL CONDITIONS.
4. APPROACH COPING(BULKHEAD) TO BE ON A COMMON PLANE WITHIN 1/4".
5. TOP OF REBAR MUST BE PLACED TO CLEAR THE ANCHOR BOLTS. ANCHOR BOLTS ARE TO BE INSTALLED AFTER FOUNDATION HAS CURED.
6. PIERS MUST BE INSTALLED WITH EXTREME CARE AND MUST NOT BE ALLOWED TO SHIFT.
7. THESE PLANS ARE NOT SUITABLE WHERE SOIL MIGRATION IS AN ISSUE. SOIL MUST BE STABLE AND NOT SUBJECT TO FLOODING OR OTHER POSSIBLE CAUSES OF SOIL MIGRATION THAT MAY RESULT IN SHIFTING OF THE PIERS.
8. BASE PLATES ARE NOT GROUTED. IF GROUTING IS REQUIRED ADD GROUT THICKNESS TO APPROACH DEPTH SHOWN.

REVISION		DATE	BY
LTR			

THIS DRAWING IS THE PROPERTY OF EMERY WINSLOW SCALE COMPANY, SEYMOUR, CONNECTICUT. THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS NOT TO BE USED OR DISSEMINATED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF EMERY WINSLOW SCALE COMPANY.

ALL SHARP CORNERS AND EDGES TO BE BROKEN	EMERY WINSLOW SCALE COMPANY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	SEYMOUR, CT U.S.A. TERRE HAUTE, IN.
MACHINING ± .13	FABRICATION ± .13
ALTERNATE FOUNDATION FOR 84-10070-11-TA, 100 TON 70' X 11' MOTOR TRUCK SCALE	
SCALE 1:30	DRAWING NO. 72583